

Fundamental

Series

HOME&OFFICE



S201




Form Factor : 2.5"	Interface : SATA 3.0	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI/Yeestor/Realtek	Technology : TLC
Transfer Rate : 6Gbps	Seq R Speed : 500-560MB/s	Seq W Speed : 420-520MB/s
Bandwidth : 600MB/s	RDM R Speed(4K) : 280-350MB/s	RDM W Speed(4K) : 280-350MB/s
Capacity : 120GB-2TB	Dimension : 100*70*7mm	Enclosure : Plastic ABS
Brand : Bestoss/OEM/ODM	Warranty : 5 Years	




S218

Form Factor : 2.5"	Interface : SATA 3.0	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI/Yeestor/Realtek	Technology : TLC
Transfer Rate : 6Gbps	Seq R Speed : 500-560MB/s	Seq W Speed : 420-520MB/s
Bandwidth : 600MB/s	RDM R Speed(4K) : 280-350MB/s	RDM W Speed(4K) : 280-350MB/s
Capacity : 256GB-2TB	Dimension : 100*70*7mm	Enclosure : Alluminum alloy
Brand : Bestoss	Warranty : 5 Years	

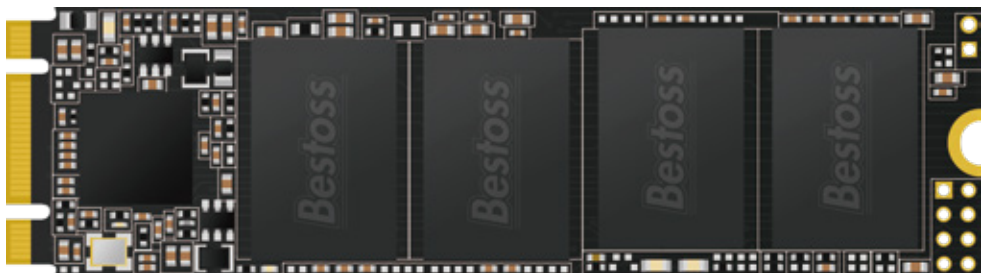


S202

Form Factor : M.2 2280	Interface : SATA 3.0	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI/Yeestor/Realtek	Technology : TLC
Transfer Rate : 6Gbps	Seq R Speed : 550MB/s	Seq W Speed : 420-520MB/s
Bandwidth : 600MB/s	RDM R Speed(4K) : 280-350MB/s	RDM W Speed(4K) : 280-350MB/s
Capacity : 120GB-2TB	Dimension : 22*80*2mm	Brand : Bestoss/OEM/ODM
Warranty : 5 Years		

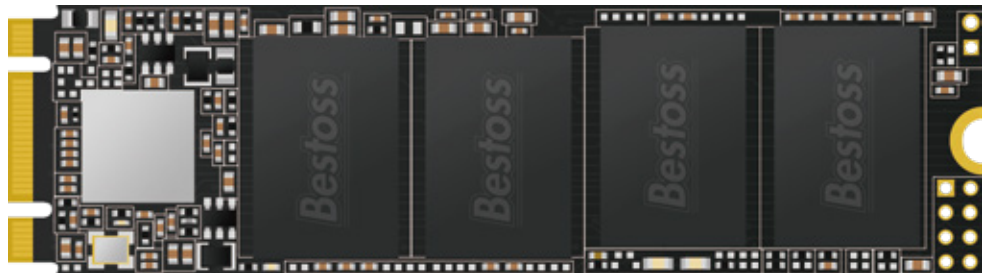

GM228

Form Factor : 2.5"	Interface : SATA 3.0	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI/Yeestor/Realtek	Technology : TLC
Transfer Rate : 6Gbps	Seq R Speed : 560MB/s	Seq W Speed : 480-540MB/s
Bandwidth : 600MB/s	RDM R Speed(4K) : 280-350MB/s	RDM W Speed(4K) : 280-350MB/s
Capacity : 256GB-2TB	Dimension : 22*80*2mm	Brand : Bestoss
Warranty : 5 Years		

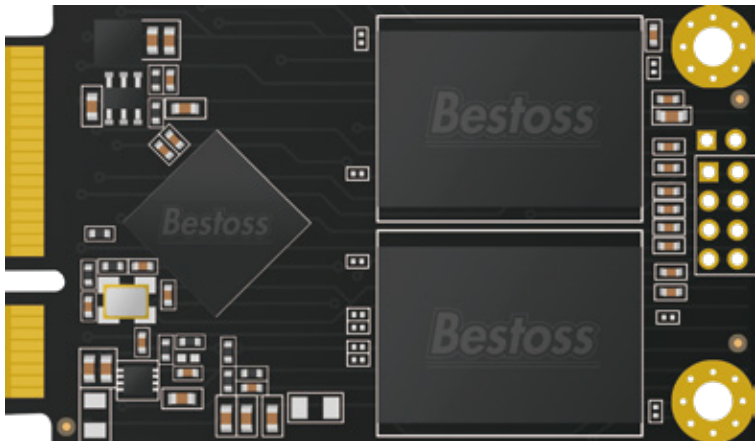


S203

Form Factor : MSATA	Interface : SATA 3.0	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI/Yeestor/Realtek	Technology : TLC
Transfer Rate : 6Gbps	Seq R Speed : 500-560MB/s	Seq W Speed : 420-520MB/s
Bandwidth : 600MB/s	RDM R Speed(4K) : 280-350MB/s	RDM W Speed(4K) : 280-350MB/s
Capacity : 120GB-2TB	Dimension : 50*30*2mm	Brand : Bestoss/OEM/ODM
Warranty : 5 Years		

Intermediate PCIe Series

VIDEO&GAME

INTERMEDIATE

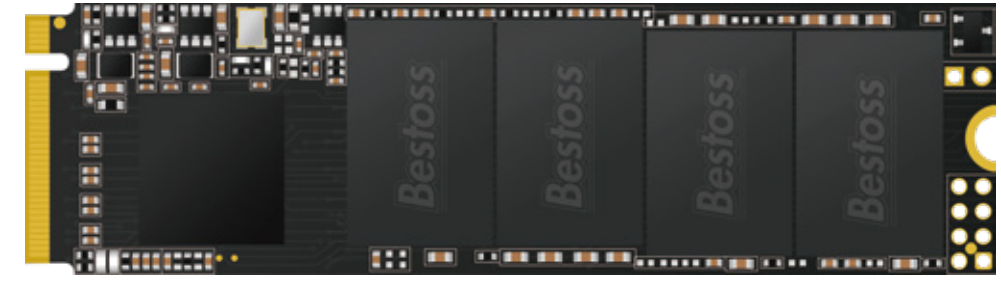

S208

Form Factor : M.2 2280	Interface : PCIe Gen3x4	Flash Type : 3D NAND
Flash : Micron/Sandisk/Hynix	Controller : SMI	Technology : TLC
Transfer Rate : 8Gbps	Seq R Speed : 1200-2900MB/s	Seq W Speed : 800-2000MB/s
Bandwidth : 4GB/s	RDM R Speed(4K) : 500-900MB/s	RDM W Speed(4K) : 500-900MB/s
Capacity : 120GB-2TB	Dimension : 22*80*2mm	Brand : Bestoss/OEM/ODM
Warranty : 5 Years		



GM318

Form Factor : M.2 2280	Interface : PCIe Gen3x4	Flash Type : 3D NAND
Flash : TAS	Controller : SMI	Technology : TLC
Transfer Rate : 8GT/s	Seq R Speed : 3000MB/s	Seq W Speed : 2000MB/s
Bandwidth : 4GB/s	RDM R Speed(4K) : 500-900MB/s	RDM W Speed(4K) : 500-900MB/s
Capacity : 512GB-1TB	Dimension : 22*80*2mm	Brand : Bestoss/OEM/ODM
Warranty : 5 Years		

PREMIUM


Premium PCIe Series

LARGE GAMES



GM528

Form Factor : M.2 2280	Interface : PCIe Gen4x4	Flash Type : 3D NAND
Flash : TAS	Controller : SMI/TenaFeTC2200	Technology : TLC
Transfer Rate : 16GT/s	Seq R Speed : 4900MB/s	Seq W Speed : 2700-4500MB/s
Bandwidth : 8GB/s	RDM R Speed(4K) : 360K IOPS	RDM W Speed(4K) : 440K IOPS
Capacity : 256GB-2TB	Dimension : 22*80*2mm	Brand : Bestoss/OEM/ODM
Warranty : 5 Years		

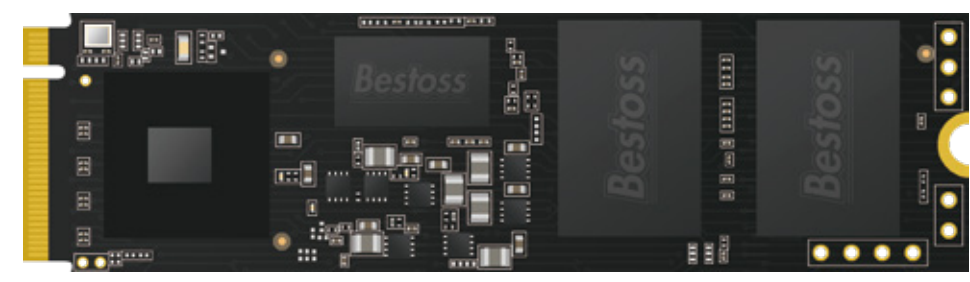

GM888

Form Factor : M.2 2280	Interface : PCIe Gen4x4	Flash Type : 3D NAND
Flash : TAS	Controller : Rainier IG5236	Technology : TLC
Transfer Rate : 16GT/s	Seq R Speed : 7400MB/s	Seq W Speed : 5500-6500MB/s
Bandwidth : 8GB/s	RDM R Speed(4K) : 500-900MB/s	RDM W Speed(4K) : 500-900MB/s
Capacity : 512GB-2TB	DRAM Cache : 512MB-2GB	Dimension : 22*80*2mm
Brand : Bestoss/OEM/ODM	Warranty : 5 Years	